



HVAC Products


SUBMITTAL

Mar 2018

308 SERIES DUAL EXPANSION JOINT 4" TRAVEL W/WELD ENDS - HIGH PRESSURE

PROJECT:	
CUSTOMER:	
ENGINEER:	
ARCHITECT:	

MATERIALS OF CONSTRUCTION	
'A' PIPE SCH 40:	CARBON STEEL
'B' CAPSULE:	T-304 STN STL
'C' BASE PLATE:	CARBON STEEL
'D' PLATE FLANGES:	CARBON STEEL

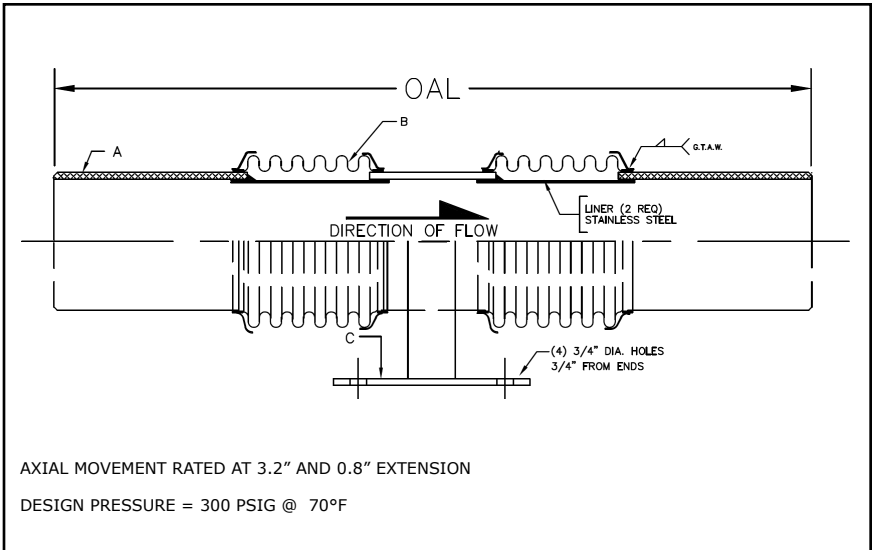

QTY	ID # OR TAG #	DIA (IN)	KEFLEX PART #	OAL	AXIAL FORCE TO COMPRESS (LBS)	WEIGHT (LBS)	3D Model (.stp)
		2"	F020H308DB904	24"	175	19	
		2 1/2"	F024H308DB904	24"	350	19	
		3"	F030H308DB904	24"	225	37	
		4"	F040H308DB904	24"	575	52	
		5"	F050H308DB904	24"	350	61	
		6"	F060H308DB904	24"	400	72	
		8"	F080H308DB904	24"	575	91	
		10"	F100H308DB904	24"	850	120	
		12"	F120H308DB904	24"	475	154	


Typical Installation

1st Pipe Guide (and anchor) placed a maximum distance of 4 X pipe diameter from expansion joint,

2nd pipe guide placed maximum of 14 X pipe diameter from first guide.

Additional guides placed per EJMA guidelines

Pipe Guide – Spider type (size appropriate for total pipe motion)

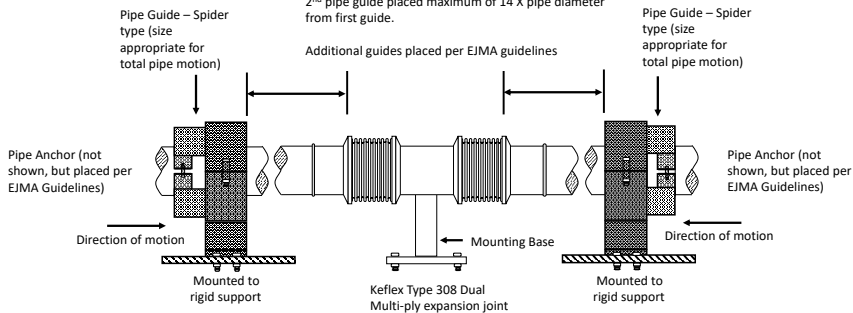

IMPORTANT LINKS

BROCHURE:	
INSTALLATION INSTRUCTIONS:	
TECHNICAL DATA:	
WEBSITE:	KELCOIND.COM



MADE IN THE USA

**1425 LAKE AVE
WOODSTOCK, IL 60098
815-334-3600**