

AC Frame Solenoid

Model 28



1425 Lake Avenue, Woodstock, IL 60098

Features:


- Available return spring kit
- AC & DC Applications (See Model 28 DC)
- UL recognized
- RoHS Compliant
- Coil Termination: 3/16" QC terminals

Electrical:

- Coil Voltages: 24, 120, 240 VAC standard
- Duty Cycle: 100% Continuous, 25% Intermittent, 10% Intermittent, 1% Intermittent
- Coil treatment: Plastic cover
- Insulation Class: Class A Rating - 105° C (221° F)
- Dielectric Strength: 1500V 60 Hz

Mechanical:

- Size: 1.13" (L) x 1.08" (W) x 1.19" (H)
 - Plunger Diameter: 0.313"
 - Plunger Guide Material: Plastic
 - Mounting: 2 - #6-32 holes
 - Weight: Plunger 0.5 oz, Total 3.5 oz
 - Life Expectancy: 1 Million Cycles¹
- ¹ - Dependent on load conditions

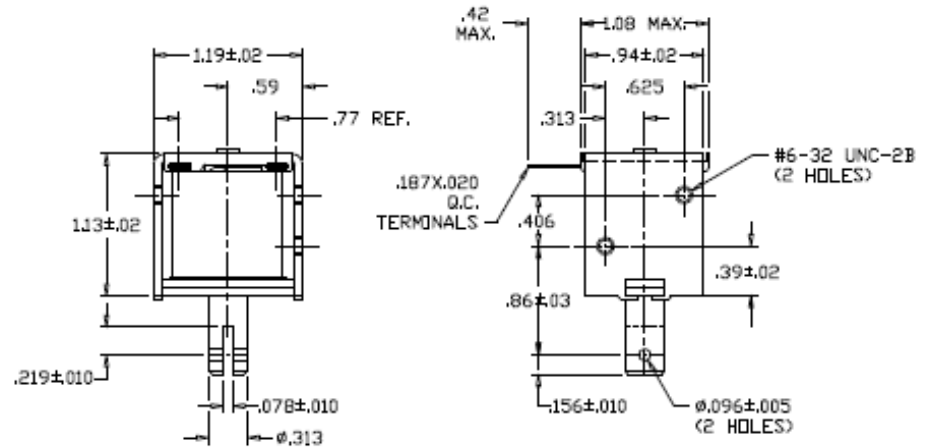

Solenoid shown energized with plunger fully seated

Standard Part Numbers

Model No.	Part No.	Duty Cycle	Voltage	Resistance ² (Ω)	Power (W)	Current
28-C-120A	A420-065446-00	Cont.	120VAC	400	8	67 mA
28-I-120A	A420-065447-00	Inter. 20%	120VAC	220	22	183 mA
28-C-240A	A420-065448-00	Cont.	240VAC	1600	8	33 mA
28-I-240A	A420-065449-00	Inter. 20%	240VAC	900	22	92 mA

² - Coil resistance tolerance +/- 5%

Contact us for custom voltages or duty cycles



Available Customization:

- Plunger
 - AC Voltage / Duty Cycle
 - Coil Termination
 - Insulation systems up to class H 180° C (356° F)
- * Minimum quantities apply

Stroke (in.)	Typical Pull Force Ounces [N] @ 20°C (68°F) (Distance from fully seated position)				HOLDING FORCE Ounces [N]
	0.125	0.250	0.375	0.500	
Continuous 100%	11 [3.1]	8 [2.2]	6 [1.7]	4 [1.1]	13 [3.6]
Intermittent 25%	18 [5]	14 [3.9]	9 [2.5]	5 [1.4]	15 [4.2]

Continuous Duty = 100% On Time
Intermittent Duty 20% = 20% On Time (4 Minutes On Max Followed By 16 Minutes Off)

Optional Return Spring Kit

A490-367462-08



www.kelcoind.com

Information contained in this specification sheet subject to change without notice. Guardian Electric ©

