

AC Laminated Solenoid

Model 16P



1425 Lake Avenue, Woodstock, IL 60098

Features:

- High stroke force
- High holding force
- Brass plunger guide
- See model 16 for Pull Model
- RoHS Compliant
- UL recognized



Electrical:

- Coil Voltages: 120, 240 VAC standard
- Coil Termination: 3/16" Quick Connects
- Duty Cycle: 100% Continuous, 10% Intermittent
- Coil treatment: Encapsulated, Tape Wrapped
- Insulation Class: Class A Rating - 105° C (221° F)
- Dielectric Strength: 1500V 60 Hz

Mechanical:

- Size: .163" (L) x 1.18" (W) x 1.44" (H)
- Plunger Width: .042"
- Plunger Guide Material: Steel
- Mounting: 6 .208" holes
- Weight: Plunger 2.5oz, Total 9.5 oz
- Life Expectancy: 250,000 Cycles¹

¹ - Dependent on load conditions

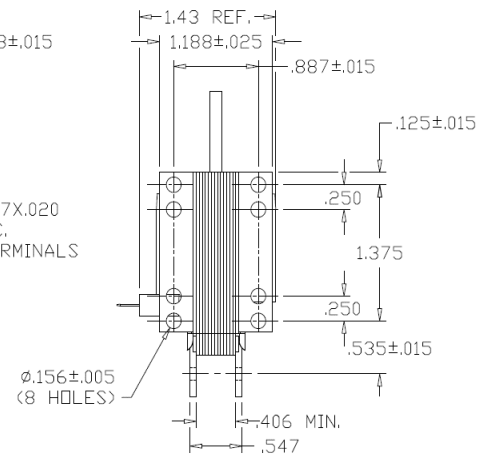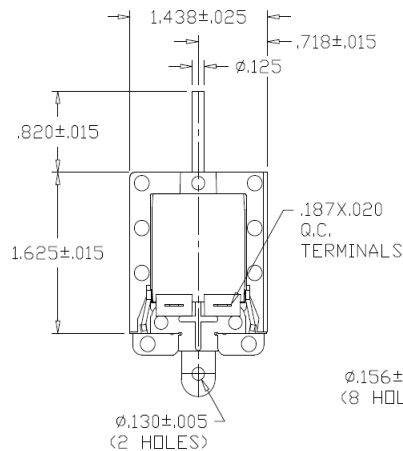

Solenoid shown energized with plunger fully seated in extended position

Standard Part Numbers

Model No.	Part No.	Duty Cycle	Voltage	Resistance ² (Ω)	Power (VA)	Current
16P-C-120A	A421-065146-00	Cont.	120VAC	41	70	583 mA
16P-I-120A	A421-065147-00	Inter. 10%	120VAC	85	20	167 mA
16P-C-240A	A421-065148-00	Cont.	240VAC	200	70	292 mA
16P-I-240A	A421-065149-00	Inter. 10%	240VAC	350	20	83 mA

² - Coil resistance tolerance +/- 5%

Contact us for custom voltages or duty cycles

Available Customization:

- Plunger Connection
 - Coil Treatment
 - Coil Terminations
 - Insulation systems up to class H 180° C (356° F)
- * Minimum quantities apply

Typical Push Force Ounces [N] @ 20°C (68°F) (Distance from fully extended position)								HOLDING FORCE Ounces [N]
Stroke (in.)	0.125	0.250	0.375	0.500	0.625	0.750	1.000	
Continuous 100%	68 [18.9]	43 [12.0]	35 [9.7]	30 [8.3]	23 [5.0]	18 [5.0]	8 [2.2]	70 [19.5]
Intermittent 10%	112 [31.1]	80 [22.2]	67 [55.6]	60 [16.7]	35 [9.7]	35 [9.7]	8 [2.2]	130 [36.1]

Continuous Duty 100% = 100% On Time

Intermittent Duty 10% = 10% On Time (2.5 Minutes On Max Followed By 22.5 Minutes Off)



www.Kelcoind.com

Information contained in this specification sheet subject to change without notice. Guardian Electric ©

