



## **SUBMITTAL**

Mar 2018

## BRONZE BRAIDED FLEXIBLE CONNECTOR MPT X MPT LONG LENGTH



MATERIALS OF CONSTRUCTION				
HOSE:	PHOS BRONZE			
BRAID:	PHOS BRONZE			
END FITTINGS:	CARBON STEEL			

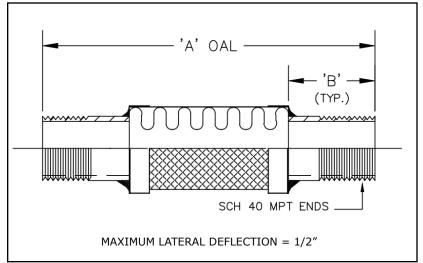

QTY	ID # OR TAG #	HOSE DIAMETER (IN)	KEFLEX PART #	PRESSURE @ 70°F	'B' REF	'A' OAL	3D Model (.stp)
		1/2″	F004KFCBMPT	700	1 1/2"	10"	3D
		3/4"	F006KFCBMPT	570	1 1/2"	11"	3D
		1"	F010KFCBMPT	460	1 3/4"	12"	3D
		1 1/4"	F012KFCBMPT	360	2 1/4"	13"	3D
		1 1/2"	F014KFCBMPT	320	2 1/4"	14"	3D
		2″	F020KFCBMPT	310	2 1/4"	15"	3D
		2 1/2"	F024KFCBMPT	270	2 1/4"	16"	3D
		3″	F030KFCBMPT	210	2 1/4"	17″	3D
		4"	F040KFCBMPT	140	2 1/4"	20"	3D

FOR PHOS BRONZE BRAID ABOVE 70°F			
TEMP °F	FACTOR		
70	1.00		
200	0.86		
300	0.83		
400	0.78		



PROCESS MEDIA NSF/ANSI/CAN 61-2022 NSF/ANSI/CAN 372-2022 MH65354

NOTE: FOR SAFE WORKING PRESSURE MULTIPLY PRESSURE RATING AT 70°F BY THE APPLICABLE CORRECTION FACTOR

IMPORTANT LINKS				
BROCHURE:	POF 			
INSTALLATION INSTRUCTIONS:	PDF 			
WEBSITE:	FLEX-WELD.COM			



1425 LAKE AVE WOODSTOCK, IL 60098 815-334-3600