


BILL OF MATERIAL	
DESCRIPTION	MATERIAL
COVER & TUBE	EPDM
FLANGES, 150# DRILLING	COATED CARBON PLATE STEEL
BODY REINFORCING	NYLON
CONTROL RODS	GALVANIZED STEEL

MAX. TEMPERATURE: 250° F

TAG #	LOC.	DIA [IN.]	KEFLEX PART #	DESIGN PRESS @170 F	OAL	AXIAL COMP.	AXIAL EXT.	LATERAL DEFL.	ANGULAR DEFL.
		1"	F010SEE060	225	6"	1/2"	3/8"	1/2"	37°
		1 1/4"	F012SEE060	225	6"	1/2"	3/8"	1/2"	31°
		1 1/2"	F014SEE060	225	6"	1/2"	3/8"	1/2"	27°
		2"	F020SEE060	225	6"	1/2"	3/8"	1/2"	20°
		2 1/2"	F024SEE060	225	6"	1/2"	3/8"	1/2"	17°
		3"	F030SEE060	225	6"	1/2"	3/8"	1/2"	14°
		4"	F040SEE060	225	6"	3/4"	1/2"	1/2"	14°
		5"	F050SEE060	225	6"	3/4"	1/2"	1/2"	11°
		6"	F060SEE060	225	6"	3/4"	1/2"	1/2"	9°

DRAWN	DG	KEFLEX PRODUCTS 1425 LAKE AVENUE WOODSTOCK, ILLINOIS 60098			
DATE	9 OCT 01				
CHECKED		TITLE EPDM SINGLE SPHERE EXPANSION JOINT WITH 150# FLOATING FLANGES & CONTROL RODS			
APPROVED	DG	SIZE	FSCM NO.	DWG NO.	REV
FILE	SUBESAF3.DWG	A	87738	SUBMITTAL DRAWING	A
JOB	EJ/SUBMITTAL	SCALE	NONE	SHEET	1 OF 2

SUBMITTED BY:	DATE
CLIENT APPROVAL	DATE

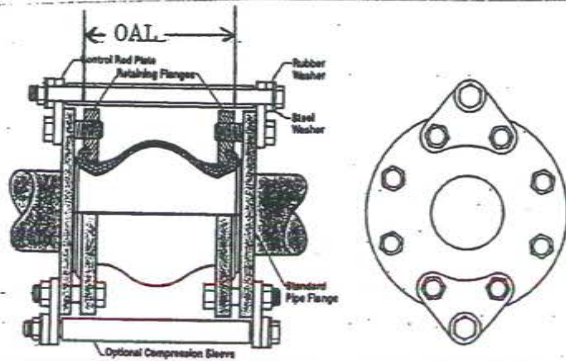

BILL OF MATERIAL	
DESCRIPTION	MATERIAL
COVER & TUBE	EPDM
FLANGES, 150# DRILLING	COATED CARBON PLATE STEEL
BODY REINFORCING	NYLON
CONTROL RODS	GALVANIZED STEEL

MAX. TEMPERATURE: 250° F

TAG #	LOC.	DIA[IN.]	KEFLEX PART #	DESIGN PRESS @170 F	OAL	AXIAL COMP.	AXIAL EXT.	LATERAL DEFL.	ANGULAR DEFL.
		8"	F080SEE060	225	6"	3/4"	1/2"	1/2"	7°
		10"	F100SEE080	225	8"	1"	5/8"	3/4"	7°
		12"	F120SEE080	225	8"	1"	5/8"	3/4"	6°
		14"	F140SEE080	150	8"	1"	5/8"	3/4"	5°
		16"	F160SEE080	125	8"	1"	5/8"	3/4"	4°
		18"	F180SEE080	125	6"	1"	5/8"	3/4"	4°
		20"	F200SEE080	125	8"	1"	5/8"	3/4"	3°
		24"	F240SEE100	110	10"	1"	5/8"	3/4"	3°
		30"	F300SEE100	110	10"	1"	5/8"	3/4"	2°

DRAWN	DG	KEFLEX PRODUCTS 1425 LAKE AVENUE WOODSTOCK, ILLINOIS 60098			
DATE	9 OCT 01				
CHECKED		TITLE			
APPROVED	DG	EPDM SINGLE SPHERE EXPANSION JOINT WITH 150# FLOATING FLANGES & CONTROL RODS			
SUBMITTED BY:	DATE	SIZE	FSCM NO.	DWG NO.	REV
CLIENT APPROVAL	DATE	A	87738	SUBMITTAL DRAWING	A
		JOB	SCALE	SHEET	
		EJ/SUBMITTAL	NONE	2 OF 2	