



**SUBMITTAL**  
**NOVEMBER 2023**

300 SERIES STN  
STL GROOVE ENDS  
TYP




**UL LISTED #150**  
**U-LOOP ASSEMBLY W/ S.S GROOVE ENDS**  
**(4" MOVEMENT)**

PROJECT	
CUSTOMER	
ENGINEER	
ARCHITECT	

T-321 SS HOSE  
T-304 SS BRAID  
& BRAID SLEEVES

300 SERIES STN STL  
DRAIN PORT & PLUG

300 SERIES STN STL  
MOUNTING HANGER

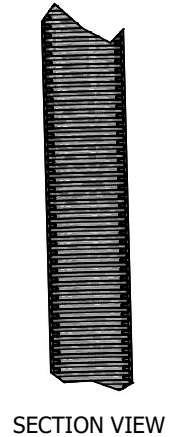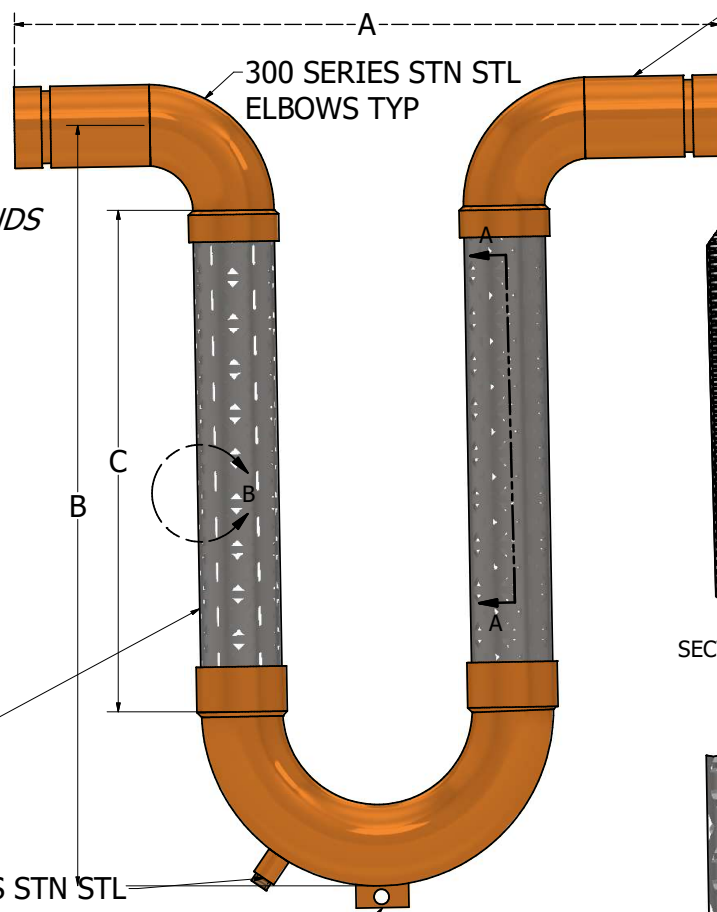

QTY	KEFLEX PART #	HOSE DIA (IN)	'A' = OAL	'B' = HEIGHT	'C' = HANG LENGTH	MOVEMENT (IN)	PRESSURE @ 70 F (PSI)	DRAIN SIZE (IN)	WEIGHT (LBS)
	F020KFCSGUS40UL	2"	19"	22-1/4"	15"	4"	175	1/2"	14
	F024KFCSGUS40UL	2-1/2"	21"	27"	18"	4"	175	1/2"	23
	F030KFCSGUS40UL	3"	24"	29-1/4"	18-1/2"	4"	175	1/2"	27
	F040KFCSGUS40UL	4"	30"	34-3/4"	20-1/2"	4"	175	1/2"	54
	F060KFCSGUS40UL	6"	44"	44-3/8"	23"	4"	175	3/4"	133
	F080KFCSGUS40UL	8"	56"	52-3/8"	24"	4"	175	3/4"	261

**PRESSURE REDUCTION FACTOR FOR T-304 SS BRAID ABOVE 70 F**

TEMP (*F)	FACTOR
70	1.00
200	0.91
300	0.85
400	0.78
500	0.77
600	0.76

NOTE:  
FOR SAFE WORKING  
PRESSURE MULTIPLY PRESSURE  
RATING AT 70\*F BY THE APPLICABLE  
CORRECTION FACTOR



**1425 LAKE AVE**  
**WOODSTOCK, IL, 60098**  
**815-334-3600**  
[www.kelcoind.com](http://www.kelcoind.com)