

Applications:

Vibration Isolation
Pipe Expansion Movement

Fire Rated
&
NSF 61 Listed

Used On:

Water Source Heat Pumps
Fan Coils
Water Coolers
Water Heaters

Materials of Construction:

Male & female fittings:

1/2" - 1" Brass

1-1/4" - 2" Steel

Ferrules: Steel, Stainless, and Aluminum

Braided hose: Stainless steel

Core: EPDM

Engineering Data:

Maximum temperature range 25° / 195° F.

Hose Assemblies are Intended for Water Use Only

This is a fire rated flexible connector.

Hose Fittings Available:

Fixed Male x Male Swivel


Male x Female Swivel

Lengths Available from 12" - 48" in 6" Increments

Contact Factory for Custom Lengths and Sizes




HPH SERIES

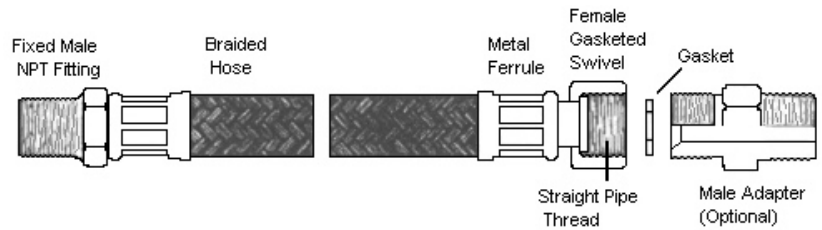

SIZE	BEND RADIUS	WORKING PRESSURE	BURST PRESSURE	TEMP. MIN/MAX
1/2"	2"	350 PSI	1400 PSI	25°/195° F
3/4"	3.25"	300 PSI	1200 PSI	25°/195° F
1"	4"	225 PSI	900 PSI	25°/195° F
1-1/4"	5.25"	200 PSI	800 PSI	25°/195° F
1-1/2"	6.5"	150 PSI	600 PSI	25°/195° F
2"	8"	100 PSI	400 PSI	25°/195° F

HPHC SERIES

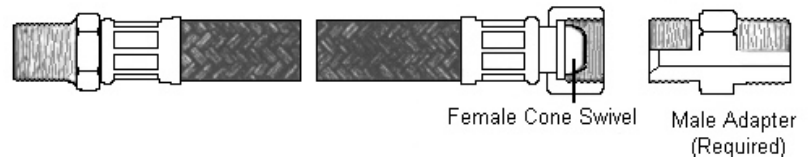

SIZE	BEND RADIUS	WORKING PRESSURE	BURST PRESSURE	TEMP. MIN/MAX
1/2"	2"	350 PSI	1400 PSI	25°/195° F
3/4"	3.25"	300 PSI	1200 PSI	25°/195° F
1"	4"	225 PSI	900 PSI	25°/195° F

Keflex is your single source for braided hose assemblies. Check out our:

- ▶ Gold Plus Series flexible hose
- ▶ Gold Series flexible hose
- ▶ Gold Series reducing hose
- ▶ Silver Series flexible hose
- ▶ Ke-Loop L, U & V expansion loops

