


UL LISTED #150
U-LOOP ASSEMBLY W/ S.S MPT ENDS
(4" MOVEMENT)

PROJECT	
CUSTOMER	
ENGINEER	
ARCHITECT	

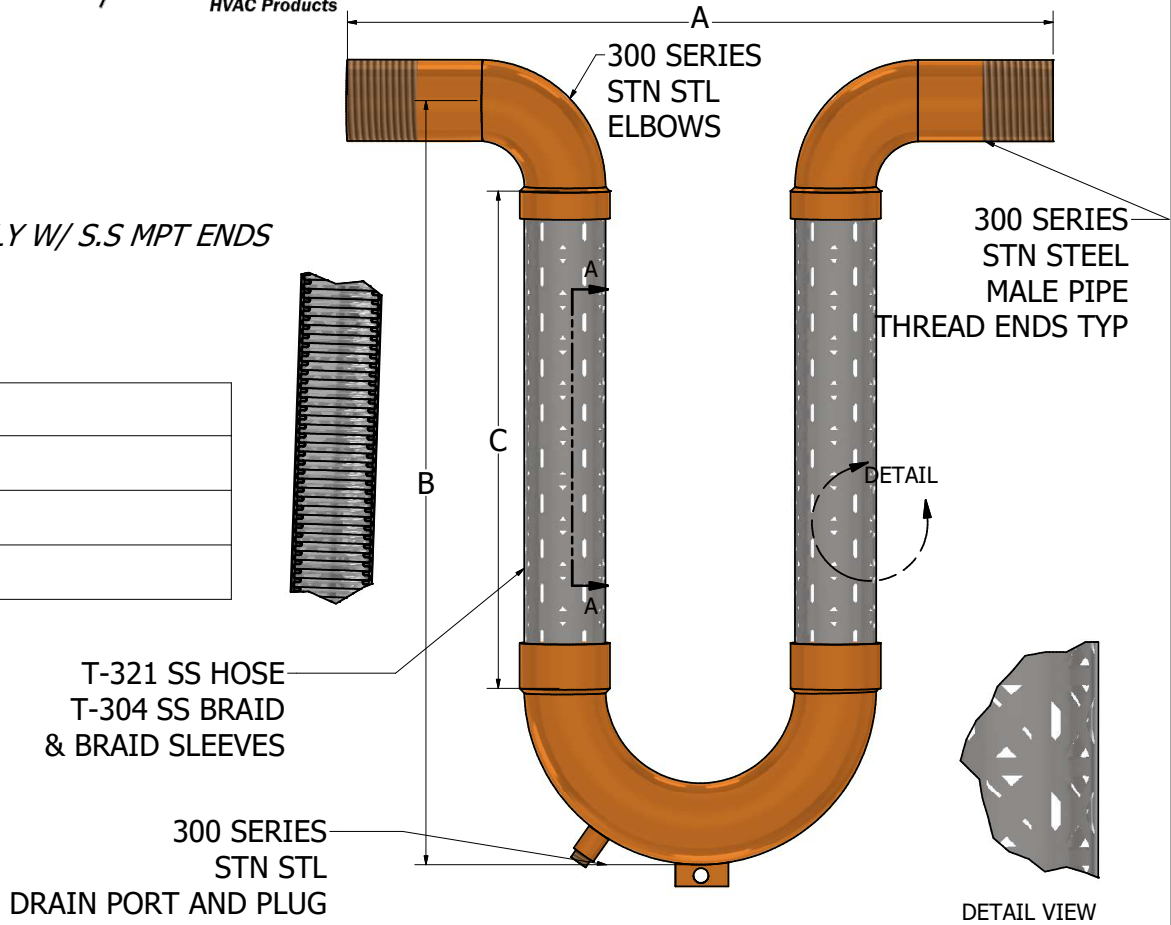

QTY	KEFLEX PART #	HOSE DIA (IN)	'A' = OAL	'B' = HEIGHT	'C' = HANG LENGTH	MOVEMENT (IN)	PRESSURE @ 70 F (PSI)	DRAIN SIZE (IN)	WEIGHT (LBS)
	F004KFCSMUS40UL	1/2"	12"	13-1/2"	10"	4"	175	1/4"	2.5
	F006KFCSMUS40UL	3/4"	12"	14-1/2"	11"	4"	175	1/4"	3.0
	F010KFCSMUS40UL	1"	12"	15-3/4"	12"	4"	175	1/4"	5.0
	F012KFCSMUS40UL	1-1/4"	14-1/2"	18-1/8"	13-1/2"	4"	175	3/8"	7.0
	F014KFCSMUS40UL	1-1/2"	16"	19-1/2"	14"	4"	175	3/8"	9.0
	F020KFCSMUS40UL	2"	19"	22-1/4"	15"	4"	175	3/8"	14
	F024KFCSMUS40UL	2-1/2"	21"	27"	18"	4"	175	1/2"	23
	F030KFCSMUS40UL	3"	24"	29-1/4"	18-1/2"	4"	175	1/2"	27
	F040KFCSMUS40UL	4"	30"	34-3/4"	20-1/2"	4"	175	1/2"	54

PRESSURE REDUCTION FACTOR FOR T-304 SS BRAID ABOVE 70 F

TEMP (*F)	FACTOR
70	1.00
200	0.91
300	0.85
400	0.78
500	0.77
600	0.76

NOTE:
FOR SAFE WORKING
PRESSURE MULTIPLY PRESSURE
RATING AT 70°F BY THE APPLICABLE
CORRECTION FACTOR



1425 LAKE AVE
WOODSTOCK, IL, 60098
815-334-3600
www.kelcoind.com