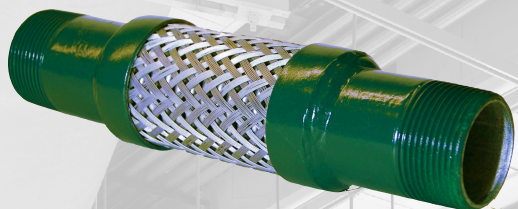


***For ECONOMICAL Vibration  
Absorption & The Elimination  
Of Piping Stress On Pumps,  
Compressors and Engines***

- ▶ Lowest Price
- ▶ Medium Duty
- ▶ All Standard Installation Lengths


**MODELS & END FITTINGS**

<b>Model</b>	<b>End Fitting</b>
SKSSPC-MPT	Male Pipe Threads
SKSSPC-FLG	150# Drilling Flanges

KEFLEX™ Silver Series SKSSPC stainless steel braided flexible hoses are manufactured from stainless steel annular corrugated metal hose surrounded with a woven braid of high tensile stainless steel. The Silver Series comes in standard lengths only and is specifically designed for medium duty applications. The Silver Series provides the same KEFLEX™ standard of quality at an economical price.

Standard end fittings for KEFLEX™ Silver Series SKSSPC units are carbon steel male nipples for sizes 1/2" through 2". Sizes 2" and larger have standard carbon steel plate flanges (5/8" minimum thickness) with ASA 150# bolt hole patterns.

These assemblies are intended for normal to severe vibration applications. Misalignment should not exceed 1/8" total. Maximum operating temperature is 850°F. For heavy-duty applications requiring significant vibration absorption, noise reduction, pressure differential reduction and longer life, please select the premier KEFLEX™ Gold Series KSSPC. For greater offset or lateral movements, use KEFLEX™ KFCS series flexible connectors.

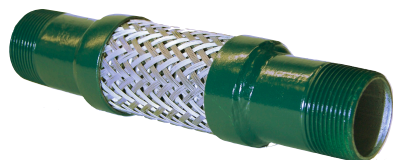

**SKSSPC-MPT**



**KSSPC-FLG**

Pipe Size (in.)	OAL (in.)	Keflex Part Number	Max Working Pressure @ 70°F* (PSI)	Approx Weight (lbs.)
1/2"	6-1/2"	F004KSSPC	825	1/2
3/4"	7"	F006KSSPC	510	3/4
1"	8"	F010KSSPC	485	1/2
1-1/4"	8-1/2"	F012KSSPC	450	1-1/4
1-1/2"	9"	F014KSSPC	410	1-1/2
2"	10-1/2"	F020KSSPCM	400	2-1/2

\*Ratings for constant pressures, use 1/2 or ratings for pulsating pressures and 1/6 of ratings for surge pressures.

Pipe Size (in.)	OAL (in.)	Keflex Part Number	Max Working Pressure @ 70°F* (PSI)	Approx Weight (lbs.)
2"	9"	F020KSSPCF	400	13
2-1/2"	9"	F024KSSPC	320	14
3"	9"	F030KSSPC	310	15
4"	9"	F040KSSPC	250	20
5"	11"	F050KSSPC	185	28
6"	11"	F060KSSPC	165	33
8"	12"	F080KSSPC	150	54
10"	13"	F100KSSPC	150	75
12"	14"	F120KSSPC	120	97

\*Ratings for constant pressures, use 1/2 or ratings for pulsating pressures and 1/6 of ratings for surge pressures.

**Keflex is your single source for braided hose assemblies. Check out our:**

- ▶ Gold Plus Series flexible hose
- ▶ Gold Series flexible hose
- ▶ Gold Series reducing hose
- ▶ Ke-Loop L, U & V expansion loops
- ▶ HPH Series Heat Pump / Water hose

