

HVAC Products


SUBMITTAL

Mar 2018

"V" LOOP - BRONZE BRAIDED HOSE ASSEMBLY W/FEMALE SWEAT ENDS

PROJECT:	
CUSTOMER:	
ENGINEER:	
ARCHITECT:	

MATERIALS OF CONSTRUCTION					
HOSE:	PHOS. BRONZE				
BRAID:	PHOS. BRONZE				
END FITTINGS, ELBOW(S) & PIPE:	COPPER				

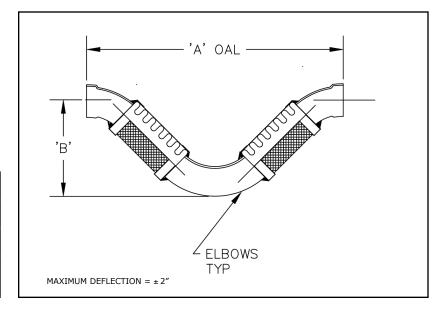

QTY	ID # OR TAG #	HOSE DIAMETER (IN)	KEFLEX PART #	PRESSURE @ 70°F	'A' OAL	'B' REF	3D Model (.stp)
		1/2"	F004KFCBVFSE20	700	19 7/8"	9 3/16"	3D
		3/4"	F006KFCBVFSE20	570	23 1/2"	10 5/8"	3D
		1"	F010KFCBVFSE20	460	25 1/4"	11 3/8"	3D
		1 1/4"	F012KFCBVFSE20	360	28″	12 11/16"	3D
		1 1/2"	F014KFCBVFSE20	320	29 7/8"	13 1/4"	3D
		2″	F020KFCBVFSE20	310	34 1/8"	14"	3D
		2 1/2"	F024KFCBVFSE20	270	43 1/8"	19 5/8"	3D
		3″	F030KFCBVFSE20	210	46 3/8"	20 1/4"	3D
		4"	F040KFCBVFSE20	140	54 1/2"	22 9/16"	3D

FOR PHOS BRONZE BRAID ABOVE 70°F				
TEMP °F	FACTOR			
70	1.00			
200	0.86			
300	0.83			
400	0.78			

NOTE: FOR SAFE WORKING PRESSURE MULTIPLY PRESSURE RATING AT 70°F BY THE APPLICABLE CORRECTION FACTOR

IMPORTANT LINKS				
BROCHURE:	POF			
INSTALLATION INSTRUCTIONS:	PDF			
WEBSITE:	KELCOIND.COM			



1425 LAKE AVE WOODSTOCK, IL 60098 Ph: 815-334-3600