

**HVAC Products** 


## **SUBMITTAL**

/ar 2018

"V" LOOP - STAINLESS STEEL BRAIDED HOSE ASSEMBLY W/150# FLANGE ENDS

PROJECT:	
CUSTOMER:	
ENGINEER:	
ARCHITECT:	

MATERIALS OF CONSTRUCTION				
HOSE:	T-321 SS			
BRAID:	T-304 SS			
END FITTINGS, ELBOW(S) & PIPE:	CARBON STEEL			

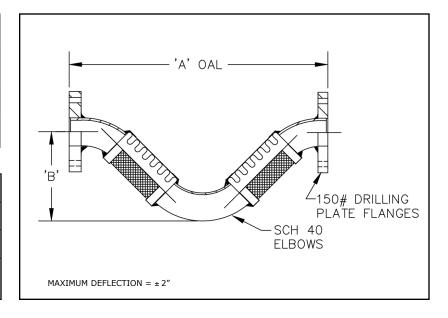

QTY	ID # OR TAG #	HOSE DIAMETER (IN)	KEFLEX PART #	PRESSURE @ 70°F	'A' OAL	'B' REF	3D Model (.stp)
		2″	F020KFCSVFLG20	510	32 1/4"	14 3/8"	3D
		2 1/2"	F024KFCSVFLG20	380	35″	15 5/16"	3D
		3″	F030KFCSVFLG20	310	40"	17 9/16"	3D
		4"	F040KFCSVFLG20	230	45 3/4"	19 7/8"	3D
		5″	F050KFCSVFLG20	190	53″	22 1/4"	3D
		6"	F060KFCSVFLG20	165	59 1/4"	24 3/4"	3D
		8"	F080KFCSVFLG20	230	71 1/4"	28 7/8"	3D

FOR T-304 SS BRAID ABOVE 70°F				
TEMP °F	FACTOR			
70	1.00			
200	0.91			
300	0.85			
400	0.78			
500	0.77			
600	0.76			
500	0.77			

NOTE: FOR SAFE WORKING PRESSURE MULTIPLY PRESSURE RATING AT 70°F BY THE APPLICABLE CORRECTION FACTOR

IMPORTANT LINKS				
BROCHURE:	POF			
INSTALLATION INSTRUCTIONS:	PDF			
WEBSITE:	KELCOIND.COM			

MADE IN THE USA

1425 LAKE AVE WOODSTOCK, IL 60098 Ph: 815-334-3600