

HVAC Products


SUBMITTAL

Mar 201

"V" LOOP - STAINLESS STEEL BRAIDED HOSE ASSEMBLY W/150# FLANGE ENDS "H" OPTION

PROJECT:	
CUSTOMER:	
ENGINEER:	
ARCHITECT:	

MATERIALS OF CONSTRUCTION					
HOSE:	T-321 SS				
BRAID:	T-304 SS				
END FITTINGS, ELBOW(S), PIPE, BRACKET & DRAIN:	CARBON STEEL				

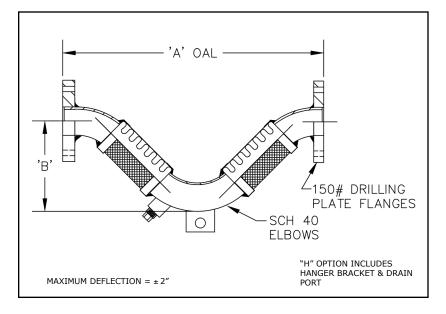

QTY	ID # OR TAG #	HOSE DIAMETER (IN)	KEFLEX PART #	PRESSURE @ 70°F	'A' OAL	'B' REF	3D Model (.stp)
		2″	F020KFCSVHFLG20	510	32 1/4"	14 3/8"	3D
		2 1/2"	F024KFCSVHFLG20	380	35″	15 3/8"	3D
		3″	F030KFCSVHFLG20	310	40"	17 5/8"	3D
		4"	F040KFCSVHFLG20	230	45 3/4"	19 7/8"	3D
		5″	F050KFCSVHFLG20	190	53″	22 3/4"	3D
		6"	F060KFCSVHFLG20	165	59 1/4"	24 3/4"	3D
		8"	F080KFCSVHFLG20	230	71 1/4"	28 7/8"	3D

FOR T-304 SS BRAID ABOVE 70°F				
FACTOR				
1.00				
0.91				
0.85				
0.78				
0.77				
0.76				

NOTE: FOR SAFE WORKING PRESSURE MULTIPLY PRESSURE RATING AT 70°F BY THE APPLICABLE CORRECTION FACTOR

IMPORTANT LINKS					
BROCHURE:	POF				
INSTALLATION INSTRUCTIONS:	PDF 				
WEBSITE:	KELCOIND.COM				

MADE IN THE USA

1425 LAKE AVE WOODSTOCK, IL 60098 Ph: 815-334-3600